

INSTRUCTION MANUAL


CAL. W136 (RE4 SERIES) CAL. W140 (RCM SERIES)
 CAL. W190 (RB7 SERIES) CAL. Y735 (RVT SERIES)
 CAL. Y736 (RB9 SERIES)

■ CHARACTERISTICS


- Time/calendar display:** Hour, minute, seconds, date, day of the week and month.
- Automatic calendar adjustment:** Calendar adjusts automatically for odd and even months except February of leap years.
- Time indication:** Changeover between 12-hour and 24-hour indications is possible.
- Stopwatch:** 24-hour stopwatch with 1/100-second readout up to 40 minutes and with 1-second readout after the first 40 minutes. Split time measurement is available.
- Alarm:** The alarm rings at the designated hour and minute with "beep, beep" for 30 seconds.
- Hourly time signal:** Can be set to ring every hour on the hour with a single "beep".
- Illuminating light (except Cal. W140):** The light evenly illuminates the display in the dark.

■ DISPLAY AND BUTTON OPERATION


[Cal. W136]

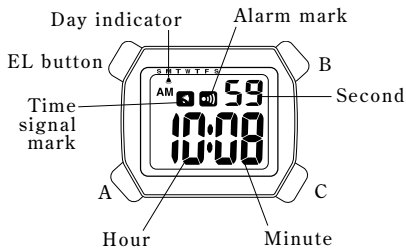

[Cal. W140]

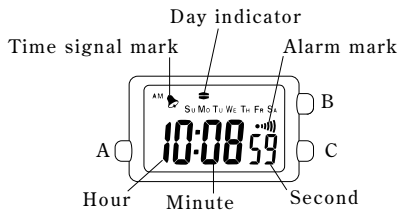


[Cal. W190 / Y735 / Y736]

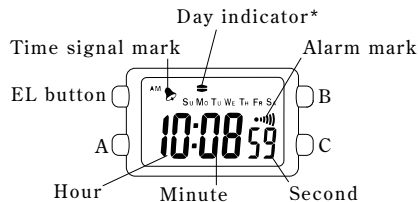

* The design of the day indication differs depending on the calibre.

Button A: • Selection of the display.


The selection is made in the following order:

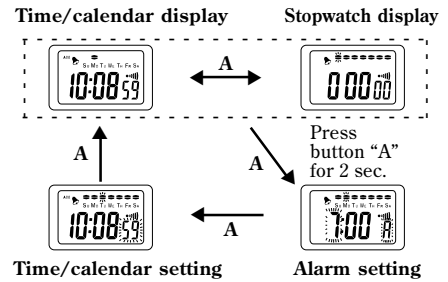

- Button B: • Calendar (month, date and day) display in the time/calendar display.
 • Start/stop in the stopwatch function.
 • Selection of the digits to be adjusted in the alarm setting function and the time/calendar setting function.
- Button C: • Alarm display in the time/calendar display.
 • Split/Reset in the stopwatch function.
 • Setting the digits in the alarm setting function and the time/calendar setting function.
 • Stopping the alarm in any display.
- Button B while keeping button C pressed: Engagement and disengagement of the alarm and the time signal.
- Button C while keeping button B pressed: Changeover of the calendar (month and date) display.
- Buttons B & C: Alarm test in the time/calendar display.


■ HOW TO SET THE DUAL CALENDAR DISPLAY

- Press button "B" to show the calendar (month, date, and day) display. The calendar display is shown while button "B" is kept pressed.
- The month and the date change places with each other with each press of button "C" while keeping button "B" pressed.



* In the 12-hour indication, "A" (AM)/"P" (PM) mark is displayed. In the 24-hour indication, there is no indication.

■ HOW TO USE THE STOPWATCH

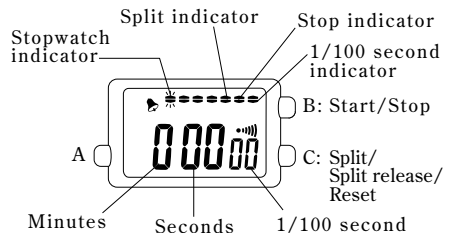

① Press button "A" in the time/calendar display. (The stopwatch indicator starts flashing.)

The stopwatch can measure up to 24 hours and is displayed in minutes, seconds, and 1/100 seconds up to 40 minutes, and in hours, minutes, and seconds after the first 40 minutes. (The 1/100 second indicator flashes during the first 40 minutes.)

When the measurement is over 24 hours, the stopwatch will be reset to "0:0000" and start counting again.

② Reset the digits to "0:0000" before using the stopwatch. When the split and the stopwatch indicators are flashing, press button "B" to check that the stop indicator starts flashing, and then press button "C" twice to reset the digits to zero.

③ When measuring a long period of time, return the stopwatch to the time/calendar display after the stopwatch starts to prevent any possible mistaken operation.

* When button "B" or "C" is pressed in the stopwatch display, a single "beep" sounds to confirm the operation.

Accumulated elapsed time measurement



ⓑ ⇒ ⓑ ⇒ ⓑ ⇒ ○○○○ ⇒ ⓑ ⇒ ⓒ

Start Stop Restart ** Stop Reset

** Restart and stop can be repeated by pressing button "B".

Split time measurement




ⓑ ⇒ ⓒ ⇒ ⓒ ⇒ ○○○○ ⇒ ⓑ ⇒ ⓒ

Start Split Split release ** Stop Reset

** Measurement and release of split time can be repeated by pressing button "C".

Measurement between two competitors




ⓑ ⇒ ⓒ ⇒ ⓑ ⇒ ⓒ ⇒ ⓒ

Start Finish time of 1st competitor Stop Finish time of 2nd competitor Reset


HOW TO SET THE ALARM

Alarm set indicator



① Press button "A" for 2 seconds to activate the alarm setting function. (The alarm set indicator starts flashing.)

② Press button "B" to activate the "Hour" or "Minute" setting. The display changes in the following order with each press of button "B".



③ One digit (flashing) is advanced with each press of button "C". The digits are advanced quickly by keeping button "C" pressed.

④ After all the adjustments are completed, press button "A" to return to the time/calendar display. (The display returns directly to the time/calendar display and not to the time/calendar setting.)

Note: When setting the hour digits, be sure to check that the "A" (AM)/"P" (PM) mark is correctly set.

HOW TO ENGAGE AND DISENGAGE THE ALARM AND THE TIME SIGNAL


① Press button "C" in the time/calendar display to show the alarm display. The alarm display is shown while button "C" is kept pressed.

Alarm display



② With each press of button "B" while keeping button "C" pressed, the engagement and disengagement of the alarm and the time signal are made as follows:

Alarm and time signal are disengaged.

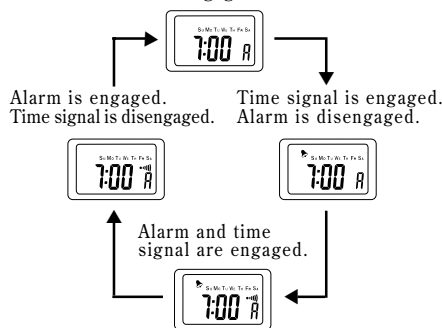

HOW TO STOP THE ALARM

The alarm rings at the designated time for 30 seconds and stops. However, the alarm can be stopped manually by pressing button "C" in any display.

ALARM TEST

The alarm can be tested with a beeping sound by pressing buttons "B" and "C" at the same time in the time/calendar display.


HOW TO SET THE TIME/CALENDAR

Time/calendar setting indicator



① Press button "A" to activate the time/calendar setting function. (The time/calendar setting indicator and the second digits start flashing.)

② Selection of the digits to be adjusted (flashing) is made in the following order by pressing button "B".



③ One digit (flashing) is advanced with each press of button "C". (The digits except seconds are advanced quickly by keeping button "C" pressed.)

• Second setting

Press button "C" in accordance with a time signal. The seconds are reset to "00" and start immediately.

When the seconds count any number from "30" to "59" and button "C" is pressed, one minute is added and the seconds are immediately reset to "00".


④ After all the adjustments are completed, press button "A" to return to the time/calendar display.

Note: When setting the hour digits, be sure to check that the “A” (AM)/“P” (PM) mark is correctly set.

■ HOW TO CHANGEOVER THE 12-HOUR AND THE 24-HOUR INDICATIONS


In the calendar or the alarm display, each press of button “A” changes over the time indication display from the 12-hour to the 24-hour and vice versa.

• Changeover in the calendar display



[Keeping button “B” pressed]

• Changeover in the alarm display



[Keeping button “C” pressed]

* When the “A” (AM)/“P” (PM) mark disappears, the calendar or the alarm display is shown in the 24-hour indication.

■ LUMIBRITE WATCH

(dial, hands, buttons, case, bezel, strap, etc.)



☆ If your watch is a LORUS LUMIBRITE watch, it has following features.

LORUS LUMIBRITE watches absorb and store light energy from natural and artificial light sources and emit light in the dark. They are made of environmentally friendly material, and therefore, are harmless to human beings and the environment.

• With a full charge, LORUS LUMIBRITE watches glow in the dark hours longer than conventional luminous watches of this type. If exposed to a light of more than 500 lux (i.e., the brightness of a typical office) for approximately 10 minutes, or direct sunlight for 2 minutes, they will glow for hours.


• Since LORUS LUMIBRITE watches emit the light they store, the brightness will decrease gradually over time. The length of time they will glow may also differ slightly depending on such factors as the brightness of and distance from the light source used to charge the watch.

■ ILLUMINATING LIGHT

(except Cal. W140)

When EL button is pressed and released in the time/calendar or stopwatch display, or in the alarm setting or time/calendar setting function, the electroluminescent light evenly illuminates the display for 4 seconds for easy viewing in the dark.

EL button



Notes:

1. The watch works with one battery. When the light begins to lose its luminance, this is an indication that the battery is depleted. We recommend that you change the battery before the watch itself stops.
2. If the light is used continuously for a long time, the battery life may be less

■ ViViDiGi

ViViDiGi is a new type of liquid crystal panel that makes possible various colors and high contrast.

- Excellent light reflection and transmission make the display bright and clear.
- Various color options are available.
- Either the whole panel or the displayed data only can be illuminated. (Except Cal. W140)

* Features vary in different models.

ViViDiGi

■ BATTERY CHANGE

The miniature battery which powers your watch should last as individually specified below. However, because it is inserted at the factory, the actual life of the battery once in your possession may be less than the specified period.

Be sure to replace the battery to prevent any possible malfunction as soon as it runs down. To replace the battery, we recommend taking the watch to a local watch repair shop.

CAL. NO.	BATTERY	BATTERY LIFE (Approx.)
W136	SEIKO CR2025	8 years
W140	SEIKO CR2016	7 years
Y735		5 years
Y736		5 years
W190	PANASONIC CR1620	3 years

Note: If the alarm is used for more than 30 seconds a day (and/or the illuminating light for more than 4 seconds a day for Cal. W136, W190, Y735 and Y736), the battery life may be less than the specified period.

■ CARE OF YOUR LORUS WATCH

• BATTERY



CAUTION

Do not expose the old battery to fire or recharge it. Keep it at a place beyond the reach of children. If a child swallows it, consult a doctor immediately.

• WATER RESISTANT

Condition of use	Accidental contact with water, such as splashes and rain	Swimming and taking a shower	Skin diving	Scuba diving
Indication on the dial/case back				
No indication	NO	NO	NO	NO
WATER RESISTANT	YES	NO	NO	NO
WATER RESISTANT (50 M/5 BAR)*	YES	YES	NO	NO
WATER RESISTANT (100 M/10 BAR or) above	YES	YES	YES	NO

* If your watch is 200 M/20 BAR, 100 M/10 BAR or 50 M/5 BAR water resistant, it is so indicated on the dial/case back.

- Do not operate the buttons when the watch is wet.
- If the watch is exposed to salt water, rinse it in fresh water and then wipe it thoroughly dry.

Caution:

Leather straps are not water resistant except so indicated, even if the watch head is water resistant.

- **ALLERGIC REACTION**

Because the case and band touch the skin directly, it is important to clean them regularly. If not, shirt sleeves may be stained and those with delicate skin may develop a rash. Please wear the watch with some play to avoid any possible allergic reaction. If you develop a rash on your wrist, stop wearing and consult a physician.

- **MAGNETISM**

Your watch will not be affected by magnetism generated by household electric appliances.

- **SHOCKS AND VIBRATIONS**

Your watch may be worn for normal sports activities, but be careful not to drop it or hit it on hard surfaces.

- **TEMPERATURE**

Your watch is preadjusted so that constant accuracy may be insured at normal temperature.

■ **SERVICE**

When your LORUS watch requires repair or servicing, please see the enclosed WARRANTY/GUARANTEE.

Printed in China